




# EMERGENCY PODETIUM


## Installation Manual



**Overview**

- The emergency podetium can be integrated with XC-9242V IP network video intercom terminal, realizing full-duplex intercom, hands-free calling, receiving broadcasting and other functions.
- Column design, aesthetic than functional, easy to identify, adopting full metal case and outdoor waterproof design.
- Built-in alarm light which can be connected and driven by the controlled power output (DC 10V/500mA) on XC-9242V, the light will be flashing during intercom, or controlled by security center.
- Built-in 2pcs of 15W/8Ω embedded passive loudspeaker which can be connected and driven by the digital amplifier module of XC-9242V.
- Installation Method: surface mounting / flush mounting.
- Optional: Video Surveillance Pole (1.5m/2.5m).

**Installation Instruction**

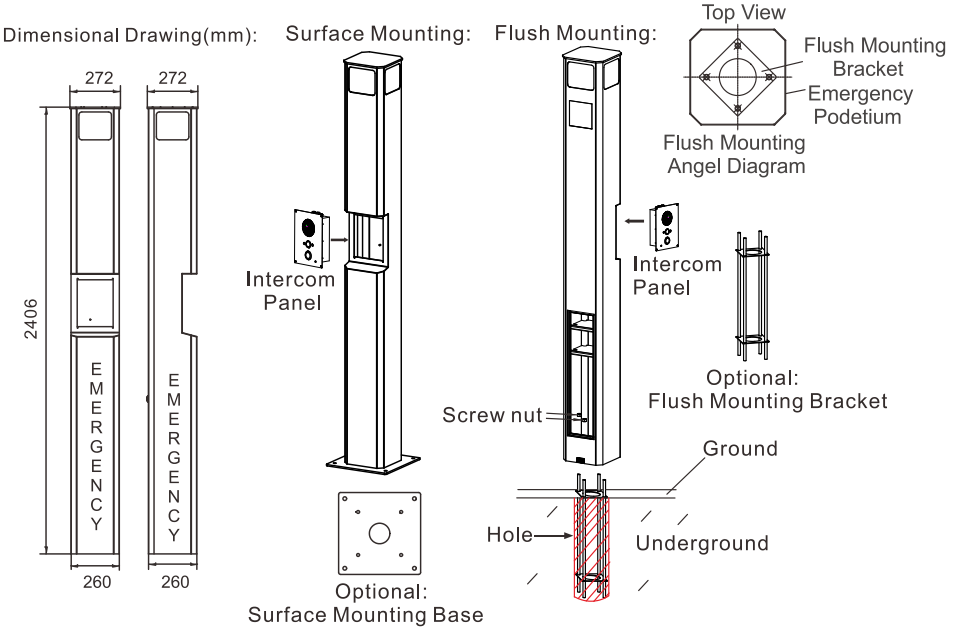

**1. Surface Mounting Instruction:**

(1) Make a concrete base with a length \* width \* depth of 700\*700\*500mm. At the same time, the power supply and network lines are led out from the middle of the plane through a PVC pipe with a length of 100mm. The concrete base surface must be level. The level of the base surface will directly affect the visual effect of the equipment installation.

(2) Fix the terminal on the alarm column (pay attention to the protection of the terminal shell during this operation), please refer to the terminal user guide for wiring.

(3) Pass the cable through the lead hole at the bottom of the device (note that a protective material must be added to the outside of the cable, such as PVC pipe or corrugated pipe), and directly lead it into the junction box on the back of the terminal, and leave enough length.

(4) After the alarm column is fixed to the base, place the alarm column on the concrete base surface, and pay attention to whether the direction of the visual inspection equipment is correct and whether it is

tilted. After all adjustments, fix the equipment on the base with 4 expansion bolts.



**2. Flush Mounting Instruction:**

First dig a hole in the ground with a length \* width \* depth: 170\*170\*650mm, and embed the concealed bracket in the ground (note: the embedded angle of the concealed bracket is 45° from the front of the alarm column), and then the alarm column Stand on the concealed mounting bracket and fasten it with nuts. The embedded mounting bracket must be vertical to the ground. Whether it is vertical or not will directly affect the visual effect of the equipment installation. Note that the leaking hole on the back should not be blocked. (Terminal installation and wiring requirements are the same as above)


**3. Wiring Requirements:**

Connect the external equipment of the alarm column (such as alarm lights, horns, cameras), the top cover of the alarm column must be uncovered (using the hexagonal wrench included in the accessories), and the wiring harness should be led under the alarm column through the waterproof connector on the upper partition of the alarm column Inside the cylinder. It is forbidden to lead from the drain pipe inside the alarm column to prevent the danger caused by electric leakage.

**Video Surveillance Pole Installation Instruction (Optional)**

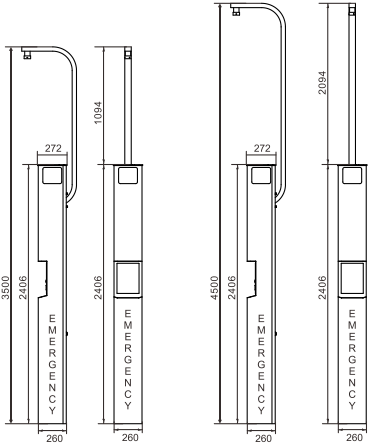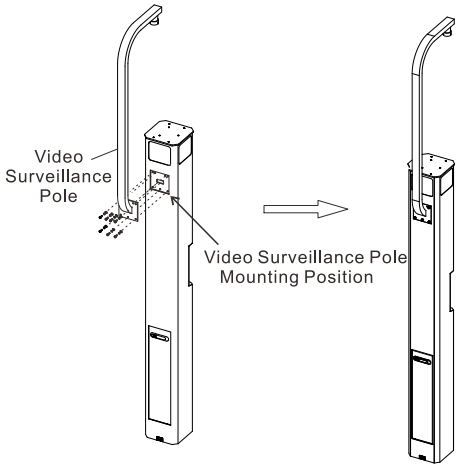Dimensional Drawing	Installation Diagram
 <p data-bbox="132 1024 322 1082">Optional NO.1: 1.5m Video Surveillance Pole 【Total Height:3.5m】</p> <p data-bbox="333 1024 524 1082">Optional NO.2: 2.5m Video Surveillance Pole 【Total Height: 4.5m】</p>	
<p><b>Installation Instructions:</b> before delivery, 4×M8 hexagon socket screws + spring washers and washers have been installed at the video surveillance pole installation position on the back of the emergency podetium. Uninstall them, and then add 3×M8 hexagon socket screws + spring washers and washers in the accessories to fix the video surveillance pole in the specified installation position on the back of the emergency podetium.</p>	

**Electric Wiring Diagram**

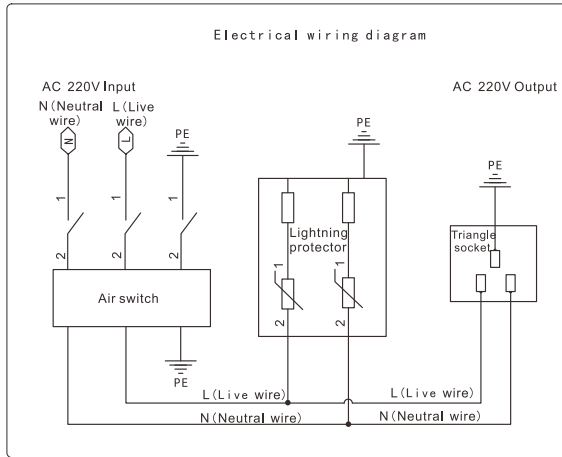

## Packing List



Key 1 PCS



Internal Hexagonal  
Wrench 1 PCS  
(2.5mm)



Internal Hexagonal  
Wrench 1 PCS  
(5mm)



Internal Hexagonal  
Wrench 1 PCS  
(6mm)



Quick Installation  
Guide 1PCS



Certification 1pcs

## Optional Suite

Optional Suite 1: Video Surveillance Pole



Video Surveillance Pole 1PCS  
(Optional: 1.5m or 2.5m)



Spring Washer 3PCS  
( $\phi$  8)



Washer 3PCS  
( $\phi$  8)



Hexagon Socket  
Screw 3PCS  
(M8\*25)



Screw Nut  
3PCS(M6)



Hexagon Socket  
Screw 3PCS  
(M6\*20)

Optional Suite 2: Flush Mounting Bracket



Flush Mounting  
Bracket 1PCS



Screw Nut  
8PCS(M14)



Spring Washer  
4PCS( $\phi$  14)



Washer 4PCS  
( $\phi$  14)

Optional Suite 3: Surface Mounting Base



Surface Mounting  
Base 1PCS



Hexagon Bolt  
4PCS(M12\*30)



Expansion Bolt  
4PCS (M12\*120)



Spring Washer  
8PCS( $\phi$  12)



Washer 8PCS  
( $\phi$  12)



SPON Communications Co.,Ltd.  
www.sponcomm.com  
Service Hotline: 86-731-85570190  
Reserve the amendment right without notice



V1.5B210720